




Users (3 - 12 years): 7
 Required surface: 48 m²
 Assembly time by 2 pers.: 10 h


Shock-absorbing properties of playground area surface should comply with EN-1176 (e.g. rubber, mulch, sand, grass, gravel rated for a fall height ≥ 1.5 m)

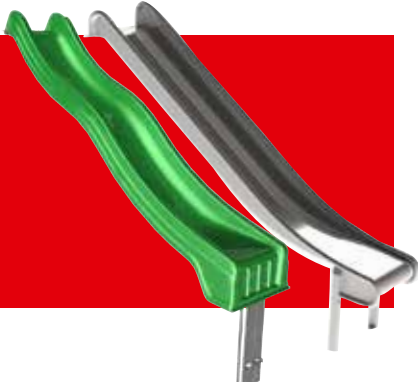

Hy-Slide Green / Hy-Slide Steel



 **890 x 310 x 405 cm**



The cut to size woodkit is manufactured from PEFC certified North-European spruce timber and high pressure impregnated.

Cross sections in woodkit :

Posts : 110 x 110 mm

Joists : 44 x 68 mm

Boards : 19 x 144 mm

Rebated boards : 19 x 145 mm

Kits: 1 x Q-Start 1 x Q-Box 1 x Q-Rock
1 x Q-Net 1 x Q-Roof 1 x S - Swing
Seats (2 pcs) 1 x S - Swing Module Start

Hy-Slide: 1

Timber package: 1

Item number: 171700202

EAN: 8711546157029

Packaging dimensions (W x D x H): 400 x 120 x 50 cm

Weight: 605 kg

Optional for non-paved construction site

Number of Anchor Sets Uni (2 pcs): 3 sets

Concrete: 440 liter (≈880 kg)

For paved construction sites additional anchoring hardware is required: e.g. chemical anchors, expanding plugs/bolts

Hy-land B.V.
P.O. Box 75083
NL 1070 AB Amsterdam
The Netherlands
info@hy-land.eu